



SPEED QUEEN® ON-PREMISES LAUNDRY SOLUTIONS

Softmount Washer-Extractors

SY180

SY240

SY280

Features and Benefits

- Freestanding, high spin
- Stainless steel front, side and top panels
- Stainless steel drum and tSB
- Patented soap hopper
- High capacity water inlets (SY280)
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

Options

- Liquid soap pumps
- Liquid soap connection
- Stainless steel side panels
- Water recovery kit
- Steam heating version
- 3rd water inlet
- High capacity water inlets SY180,SY240
- USB & RS485 plug
- Eco version : lower kW rating on request

Control


- Quantum Touch – fully programmable and customizable cycles 7" touch screen.
 - User-friendly screen with operating instructions built in as part of the control
 - Complete control content available in 34 languages
- QED – fully programmable control with 20 Pre-set programs and memory up to 99.
- Quantum Basic – Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)



Softmount Washer-Extractors

		SY180	SY240	SY280
INNERDRUM				
Capacity 1:09	kg (lb)	20 (44)	27 (60)	31 (68)
Capacity 1:10	kg (lb)	18 (40)	24 (53)	28 (62)
Volume	litres	180	240	280
Diameter	mm	750	750	750
DRUM SPEED				
Wash	rpm	42	42	42
Extraction	rpm	1047	1035	975
G-FACTOR		460	450	400
HEATING				
Electricity	kW	12 - 18	12 - 18	21, 9
Steam	bar	1-8	1-8	1-8
Hot water	°C	90	90	90
Sound pressure level	dB (A)	< 65	< 65	< 65
Water valves connection	BSP	3/4"	3/4"	3/4"
Water pressure	kPa	100-800	100-800	100-800
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet	l/min	20	20	20-50
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
DIMENSIONS				
Size H×W×D	mm	1430×970×970	1430×970×1105	1430×970×1185
Net weight	kg	380	430	495
TRANSPORT DATA				
Packed H×W×D	mm	1550×1025×1015	1550×1025×1150	1550×1025×1225
Gross weight	kg	395	450	515

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	R	S	T	U	V	W
SY180	970	24	477	1430	777	335	1095	1007	48	90	1234	490	108.5	1324	80	293	610	218	113	113
SY240	970	24	477	1430	777	335	1095	1007	48	90	1234	490	108.5	1324	80	293	610	218	113	113
SY280	970	24	477	1430	777	335	1175	1087	48	90	1234	490	108.5	1324	80	293	610	218	113	113

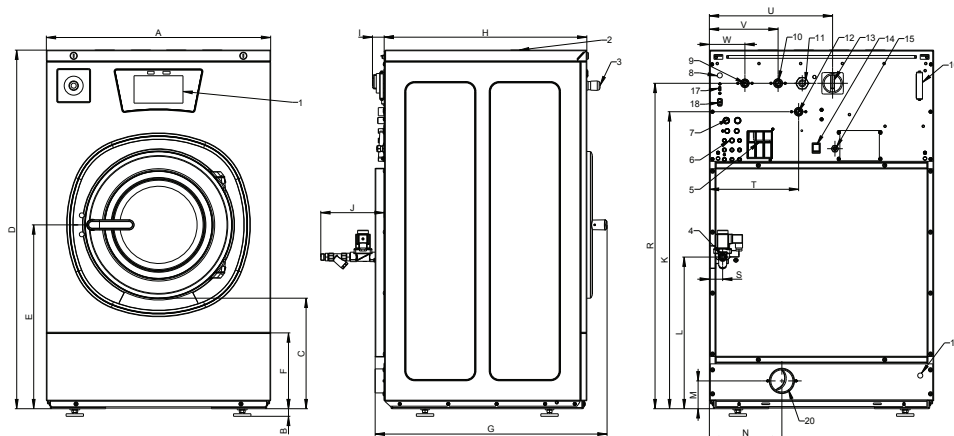

1. Control panel
2. Soap dispenser
3. Central stop button
4. Steam connection
5. Air relieve
6. Liquid soap connection
7. Recycled water inlet
8. Recycled water valve cable inlet
9. Cold water inlet, soft
10. Cold water inlet, hard
11. Electrical connection
12. Hot water inlet
13. Main switch
14. Heating change-over switch
15. Liquid soap pump electrical connection
16. Fuses
17. USB port - optional
18. PC programming connection
19. Discharge water cable inlet
20. Drain valve <3 in (76 mm)
21. Drain valve 1/2", applicable for wash bath sample (on request only)
22. Hidden USD port (under top cover) - standard